

ECW-1000-C236



产品特性

- ◆ 第7/6代Intel®Xeon®和Core™LGA1151处理器,采用Intel®C236芯片组
- ◆ 2个DDR4-2133/2400 SO-DIMM 内存插槽,可达64GB
- ◆ 三重独立显示:1 DVI-I, 2 DisplayPort
- ◆ 2个2.5" SATA 热插拔抽取式托盘 (支持RAID 0/1)
- ◆ 可用于RJ45/M12 GbE LAN, COM和DIO的3个CMI接口

产品规格

处理器	Intel®C236
内存	2*DDR4 2133/2400MHz SO-DIMM Sockets, up to 64 GB (Un-buered and Non-ECC type)
显示接口	Integrated Intel®HD Graphics supports triple independent display 1*DVI-I: 1920 x 1080 @60Hz 2*DP: 3840 x 2160 @30Hz
储存	2*SATA III (6Gbps) for 2.5" HDD/SSD 4*mSATA (Shared by Mini-PCIe Socket) (Gen3) Supports S/W RAID 0, 1, 5 & 10
以太网网络	1*Intel®I219-LM (10/100/1000M) 1*Intel®I210 (10/100/1000M)
串口	4*RS-232/422/485 with Auto Flow Control Support 5V/12V, Db9 Optional Module 2* RS-232/422/485, DB9 Connector 4*RS-232/422/485, DB9 Connector
USB	8*USB 3.0 (Type-A)
扩展插槽	1*CFM Interface for CFM Modules 3*CMI Interface for CMI Modules 4*Full-size Mini-PCIe Sockets 1*SIM Socket 3*Antenna Holes
电源	Supports AT/ATX Power Type Power Input Voltage 9~48VDC 1*3-Pin Terminal Block Power AdapterAC/DC 24V/5A 120W or 24V/9.2A 220W (Optional)
工作温度	7th Generation Intel®CPU (Kaby Lake-S) - 35W TDP CPU: -40°C~50°C - 51W~65W TDP CPU: -40°C~45°C - 73W TDP CPU: -40°C~40°C 6th Generation Intel®CPU (Skylake-S) - 35W TDP CPU: -40°C~70°C - 51W~65W TDP CPU: -40°C~55°C - 80W TDP CPU: -40°C~40°C (With Extended Temperature Peripherals; Ambient with Air Flow; According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
存储温度	-40~85°C
固定方式	Wall固定支架 - 支架与螺丝

ECW-1000-C236


产品规格

尺寸	ECW-1000: 227mm x 86mm x 261mm (W x H x D)
----	--

可选功能模组

功能	规格
LAN	Optional Module - 4x 10/100/1000 Mbps, RJ45 Port - 4x 10/100/1000 Mbps, M12 Port
PoE+	Optional Module - 4x PoE+, Individual port 25.5W (with CMI-LAN01, RJ45 Port) - 4x PoE+, Individual port 25.5W, (with CMI-M12LAN01, M12 Port)
Serial Port	Optional Module - 2x RS-232/422/485, DB9 Connector - 4x RS-232/422/485, DB9 Connector
Isolated DIO	Optional Module - 16x Optical Isolated DIO(8DI, 8DO), 20 pin Terminal Block
Power Ignition Sensing	Optional Module - CFM with Delay Time Management and Selectable 12V/24V, Dip Switch
Power Adapter	Optional AC/DC Adapter - AC/DC 24V/5A, 120W - AC/DC 24V/9.2A, 220W

尺寸图

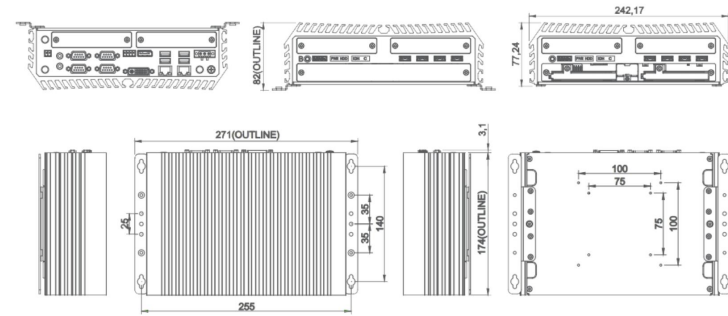

订货信息

型号	说明
ECW-1000-C236-XX	6/7th, C236, 2 LAN, 1 DVI, 2 DP, 2 COM, 8 USB, 电源适配器, 不带扩展, 可选风扇及功能模块
ECW-1001-C236-XX	6/7th, C236, 2 LAN, 1 DVI, 2 DP, 2 COM, 8 USB, 电源适配器, 带1x PCI/PCIe, 可选风扇及功能模块
ECW-1002-C236-XX	6/7th, C236, 2 LAN, 1 DVI, 2 DP, 2 COM, 8 USB, 电源适配器, 带2x PCI/PCIe, 可选风扇及功能模块