


EB-100-H310

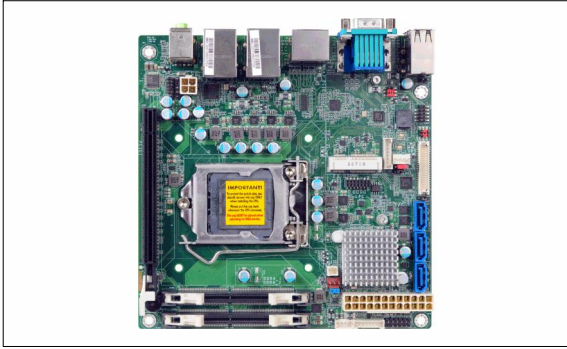

产品特性

- ◆ 1*PCIe x16, 1*mSATA
- ◆ Intel® H310芯片组
- ◆ 支持双通道 DDR4 SODIMM 至 32GB
- ◆ 1*LVDS, 1*VGA, 1*DP++
- ◆ 2*Intel网口, 8*USB, 2*串口

产品规格

处理器	8/9th Generation Intel® Core™ Processors, LGA 1151 Socket		扩展槽	1*PCIe x 16(Gen 3), 1*mSATA
系统芯片组	Intel® H310 Chipset			
系统内存	2*260-pin SODIMM up to 32GB, Dual Channel DDR4 2400/2666MHz			
BIOS	AMI SPI 128Mbit		显示	1*LVDS: resolution up to 1920x1200 @ 60Hz 1*VGA: resolution up to 1920x1200 @ 60Hz 2*DP++: resolution up to 4096x2304 @ 60Hz
以太网网络	1*Intel® I219V PHY (10/100/1000Mbps) 1*Intel® I211AT PCIe (10/100/1000Mbps)			
背部I/O接口	以太网网络	2*GbE (RJ-45)		
	USB	4*USB 3.1 Gen1, 4*USB 2.0		
	显示	1*VGA, 2*DP++		
	串口	1*RS232(DB-9)		
内部I/O接口	音源	1*Line-in (available upon request), 1*Line-out, 1*Mic-in	音频	Realtek ALC888S-VD2-GR
	串行端口	1*RS-232 (RS-232 w/power)(2.0mm pitch)	温度	工作温度: 0 to 60°C, 存储温度: -40 to 85°C
	DIO	1*8-bit DIO		
	音效	1*S/PDIF, 1*Front Audio	湿度	工作湿度: 5 to 90% RH, 存储湿度: 5 to 90% RH
	SATA	3*SATA 3.0 (up to 6Gb/s)		
显示	1*LVDS LCD Panel Connector, 1*LCD/Inverter Power	尺寸	170mm (6.7")*170mm (6.7")	

订货信息

型号	说明
EB-100-H310-XX	Mini-ITX Motherboard supports LGA 1151 Intel® Core™ i7/i5/i3/Pentium, Intel® H310