


# EB-330-H110

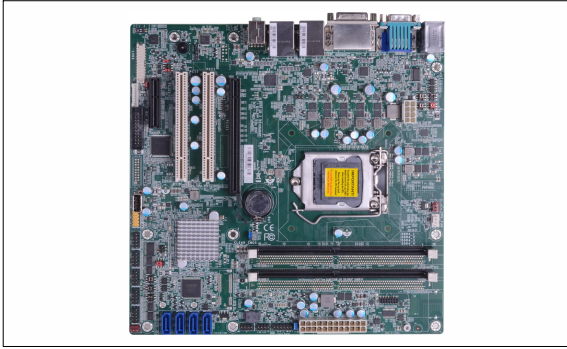

## 产品特性

- ◆ 1\*PCIe x16, 1\*PCIe x4, 2\*PCI
- ◆ Intel® H110芯片组
- ◆ 支持双通道DDR4 DIMM至 32GB
- ◆ 独立双显: 1\*VGA,1\*LVDS,1\*DVI-I(DVI-D signal),1\*DP++
- ◆ 2\*Intel网口,9\*USB,6\*串口

## 产品规格

处理器	6/7th Generation Intel® Core™ /Pentium®/Celeron® LGA 1151 Socket Processors with TDP up to 95W		扩展槽	1*PCIe x16 (Gen 3) , 1*PCIe x4 (Gen 2), 2*PCI
系统芯片组	Intel® H110 Chipset			
系统内存	2*288-pin DIMM up to 32GB Dual Channel DDR4 1866/2133MHz			
BIOS	Insyde SPI 128Mbit		显示	1*VGA: resolution up to 1920x1200 @ 60Hz 1*LVDS: dual channel, resolution up to 1920x1200 @ 60Hz 1*DVI-I (DVI-D signal) : resolution up to 1920x1200 @ 60Hz 1*DP++: resolution up to 4096x2160 @ 60Hz
背部I/O接口	以太网	2*GbE (RJ-45)		
	串口	1*RS-232/422/485(RS-232 w/power)(DB-9)		
	USB	4*USB 3.0,2*USB 2.0		
	PS/2	1*PS/2(mini-DIN-6)		
	显示	1*VGA ,1*DVI-I (DVI-D signal) ,1*DP++		
音源	1*Line-out,1*Mic-in,1*Line-in (opt., MOQ required)		音频	Realtek ALC888S-VD2-GR
内部I/O接口	串行端口	1*RS-232/422/485 (RS-232 w/ power) (2.54mm pitch) ,4*RS-232 (2.54mm pitch)	温度	工作温度: 0 to 60°C, 存储温度: -40 to 85°C
	USB	2*USB 2.0 (2.54mm pitch) 1*Vertical USB 2.0 (type A)	湿度	工作湿度: 5 to 90% RH, 存储湿度: 5 to 90% RH
	音效	1*Audio (Line-out/Mic-in) (opt., MOQ required) 1*S/PDIF		
	SATA	4*SATA 3.0 (up to 6Gb/s)	尺寸	244mm (9.6")*244mm (9.6")
	DIO	1*8-bit DIO		

## 订货信息

型号	说明
EB-330-H110-XX	Micro ATX Motherboard supports LGA 1151 Intel® Core™ i7/i5/i3/Pentium, Intel® H110