


EB-600-H110

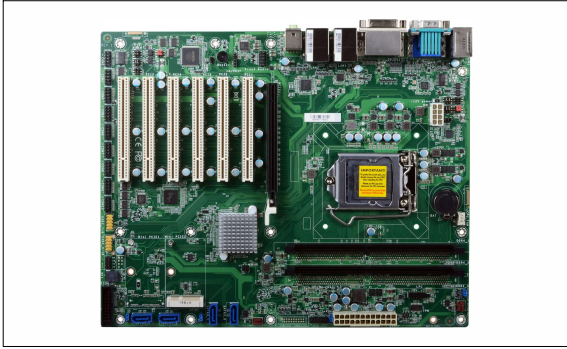

产品特性

- ◆ 6*PCI, 1*PCIex16
- ◆ Intel® H110芯片组
- ◆ 支持双通道DDR4 DIMM 至 32GB
- ◆ 1*DP++, 1*LVDS, 1*VGA, 1*DVI-I (DVI-D 讯号)
- ◆ 2*Intel网口, 10*USB,10*串口

产品规格

处理器	6/7th Generation Intel® Core™/Pentium®/Celeron® LGA 1151 Socket Processors with TDP up to 95W		扩展槽	6*PCI, 1*PCIex16
系统芯片组	Intel® H110 Chipset			
系统内存	2*288-pin DIMM up to 32GB, Dual Channel DDR4 2133/2400MHz			
BIOS	Insyde SPI 128Mbit			
以太网	1*Intel®I219V PCIe (10/100/1000Mbps) 1*Intel®I211AT PCIe (10/100/1000Mbps)		显示	1*VGA resolution up to 1920x1200 @ 60Hz 1*DP++ resolution up to 4096x2304 @ 60Hz 1*LVDS dual channel, resolution up to 1920x1200 @60Hz 1*DVI-I (DVI-D signal) resolution up to 1920x1200 @ 60Hz
背部I/O接口	以太网	2*GbE (RJ-45)		
	串口	1*RS-232/422/485(RS-232 w/power) (DB-9)		
	USB	4*USB 3.0, 2*USB 2.0	音频	Realtek ALC888S-VD2-GR
	PS/2	1*PS/2		
	显示	1*VGA,1*DVI-I (DVI-D signal),1*DP++		
	音源	1*Line-out, 1*Mic-in, 1*Line-in (opt., MOQ required)	温度	工作温度: 0 to 60°C, 存储温度:30 to 60°C with RTC Battery; -40 to 85°C without RTC Battery
内部I/O接口	串行端口	1*RS-232/422/485 (RS-232 w/power) (2.54mm pitch),8*RS-232		
	USB	4*USB 2.0	湿度	工作湿度: 5 to 90% RH, 存储湿度: 5 to 90% RH
	音效	1*Front Aduio, 1*S/PDIF		
	SATA	4*SATA 3.0 (up to 6Gb/s), 1*mSATA (co-lay with SATA_4)	尺寸	305mm (12")*244mm (9.6")
	DIO	1*8-bit DIO		

订货信息

型号	说明
EB-600-H110-XX	ATX Motherboard supports LGA1151 Intel® Core™ i7/i5/i3/Pentium/Celeron®, Intel® H110